

# COLD WATER H.P. CLEANER IDROPULITRICE AD ACQUA FREDDA

# PSL

*Professional static cold water high pressure washer.*

*Top efficiency thanks to the solid and attractive chassis entirely made in stainless steel, is used mainly in food industry.*

*Handy and easy to use, with a flow and pressure capable of meeting the most demanding tasks.*

Classe Fissa professionale ad acqua fredda .

Efficienza al top: grazie alla solida e accattivante struttura realizzata completamente in acciaio inox, trova impiego principalmente nelle industrie alimentari.

Semplice da utilizzare, ma con una portata e una potenza in grado di far fronte alle situazioni più impegnative.



*Triplex pump with ceramic plungers connecting rod system, brass head pump, with pressure gauge, pressure regulator. Safety valve*

Pompa professionale con testa in ottone e tre pistoni in ceramica, con manometro, regolazione della pressione. Valvola di sicurezza.




*TSI security system including: (A) time delayed auto stop start; (B) stop for leak detection; (C) stop for lack of water; (D) stop in case of motor overheating - error signal indicated by warning lights.*

Comando a distanza TSI (Total Stop Intelligente) con funzioni: (A) total stop temporizzato; (B) arresto per microperdite; (C) arresto per mancanza acqua; (D) arresto per surriscaldamento motore - segnalazione d'errore tramite spia intermittente.

*Electric Motor Motor with thermal protector. Motore elettrico con protezione termica. 230/400 V / 50 Hz Standard. 60 Hz Su richiesta / On request.*

*5 mt. electric cable. Cavo elettrico da 5 mt.*

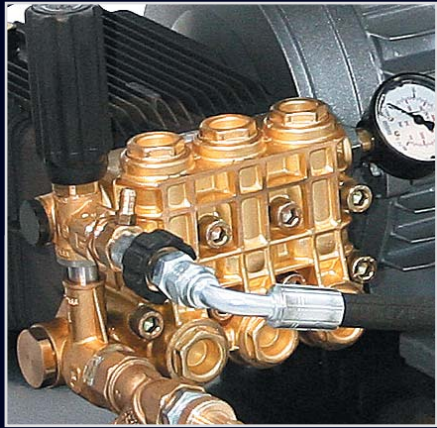


*24 V control panel. Comandi in bassa tensione (24V).*



*H.P. detergent suction probe. Sonda per aspirazione liquido detergente in alta pressione. (cod. 7280030)*



**STANDARD ACCESSORIES ACCESSORI STANDARD**

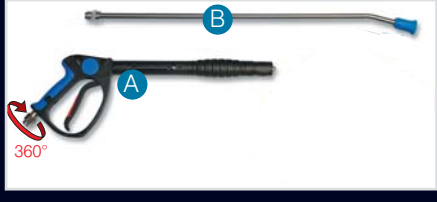

**A** Gun / Pistola (cod. 6600600)  
**B** Lance / Lancia (cod. 6600610)




PSL	Code Codice	Max. pressure Max. pressione		Flow rate Portata		Power Potenza	Size Classe	R.P.M.	Max inlet water temp. Temp. max. acqua		Weight Peso	Box dimensions Dimensione scat.	Pallet q.ty Q.tà pallet		Q.ty per container Q.tà per container		Machine dimensions Dimensione macchina
		bar	PSI	Lt/h	gph				°C	°F			20 ft	40 ft	LxWxH (cm)		
<b>W 10.12 M-TSI</b>	91650050	100	1.500	720	190	3	100				65	85x60x63	6	60	120	65x40x33	
<b>W 13.10 M-TSI</b>	91650040	130	1.885	600	159	3	100				65	85x60x63	6	60	120	65x40x33	
<b>WS 15.15 T-TSI</b>	91650000	150	2.176	900	238	5,5	112				72	85x60x63	6	60	120	65x40x33	
<b>WS 20.15 T-TSI</b>	91650010	200	2.901	900	238	7,5	112	1.450	60	140	75	85x60x63	6	60	120	65x40x33	
<b>WS 15.21 T-TSI</b>	91650020	150	2.176	1.260	333	7,5	112				75	85x60x63	6	60	120	65x40x33	
<b>WS 20.21 Big T-TSI</b>	91650060	200	2.901	1.260	333	10	132				90	95x65x76	4	48	96	90x40x45	
<b>XW30.15 Big T-TSI</b>	91650085	300	4.350	900	238	10	132				90	95x65x76	4	48	96	90x40x45	

Pump type - Tipo pompe **W- WS** **I.P.** **XW** **A.R.** M=1~ T=3~ **TSI** = Intelligent Total Stop - Arresto Totale Intelligente

**OPTIONAL ACCESSORIES ACCESSORI OPTIONAL**

 <p>15 lt. pipe cleaning nozzle Ugello sturatubi 15 lt. cod. 1000393</p>	 <p>Double nozzle carrier (supplied without nozzle: Testina doppia (fornita priva di ugelli) cod. I6000490</p>	 <p>15lt./min. Kit rotating nozzle Kit ugello rotante 15lt./min. cod. 1000384KIT</p>	 <p>Foam lance LS 12 Lancia schiuma LS 12 cod. P25180015</p>
---	---	---	---

<p>Kit for hot water Kit per acqua calda <b>KIT 85°C</b> cod. 1000999</p>	<p>H.P. hose 10mt. Tubo alta pressione 10 m. cod. 6000145</p> 	<p>Non marking H.P. hose 10mt. Tubo A.P. antimacchia 10 m. cod. 6100067</p> 	<p>Wall stand Supporto a parete cod. 5165000</p> 	<p>Floor stand Supporto a banco cod. 5165010</p> 
---	---	---	--	--

Pump for hot water  
Pompa per acqua calda  
**85°C PUMP** **I.P.** **A.R.**